

HOW TO Install a Roman Blind with Sidewinder Mechanism



What you'll need



PENCIL



TAPE MEASURE



SPRING CLIP



SCREWDRIVER



SCREWS



DRILL



WALL PLUGS



STEP LADDER




SAFETY DEVICE


What to do




1 Decide on the fixing position for the blind - inside or outside of the window reveal.

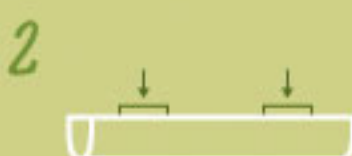

2 Press in spring-clip to detach the head rail from the brackets.

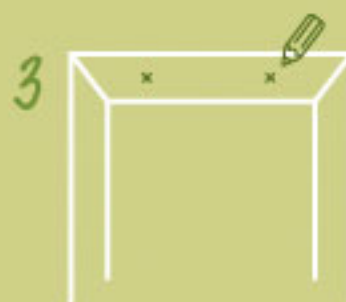

3 Mark the position for the brackets on the wall, leaving a gap of at least 30mm between the brackets and the head rail ends.

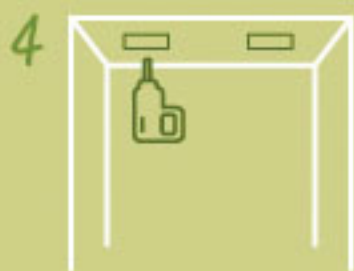


4 Drill screw holes and fix the brackets.



5 Peel apart the Velcro to detach the blind from the metal head rail.



6 Hold up the head rail with the Velcro facing you and attach the front lip of the head rail to the spring-clip on the front of the brackets. Then attach the clips on the brackets to the back lip of the head rail. This will secure the bracket in place.

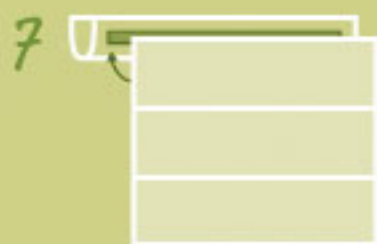

7 Align the Velcro strips and attach the Roman blind to the head rail.



8 Fix the safety device to the wall to ensure the sidewinder mechanism is safe.

